

NOTES:

1. AC PLUG SHALL BE 4" THICK OR MATCH EXISTING PAVEMENT THICKNESS, WHICHEVER IS GREATER.
2. AGGREGATE BASE SHALL BE COMPACTED TO 95% OF MAXIMUM DRY DENSITY.
3. INSTALL PAVERS AND ALL BASE MATERIALS PER MANUFACTURER'S RECOMMENDATIONS.

LEGEND:


- |  |                  |  |                        |
|--|------------------|--|------------------------|
|  | CONCRETE PAVERS  |  | AGGREGATE BASE         |
|  | BEDDING SAND     |  | AC PLUG                |
|  | BASE MATERIAL    |  | EXISTING PAVEMENT      |
|  | SUBBASE MATERIAL |  | PERMEABLE PARKING AREA |
|  | PCC              |  | NATIVE MATERIAL        |
|  |                  |  | NOTES                  |



Approved. \_\_\_\_\_

City Engineer

Date




REVISION

Description

Date

ENGINEERING DIVISION

PERMEABLE CONCRETE  
PAVERS IN ROADSIDE  
DRAINAGE SWALE

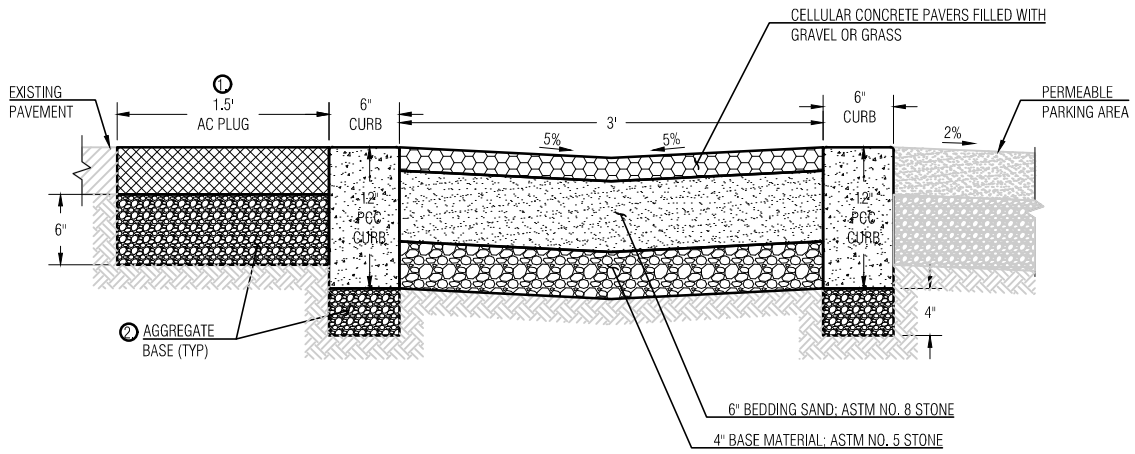

**NOTES:**

1. AC PLUG SHALL BE 4" THICK OR MATCH EXISTING PAVEMENT THICKNESS, WHICHEVER IS GREATER.
2. AGGREGATE BASE SHALL BE COMPACTED TO 95% OF MAXIMUM DRY DENSITY.
3. INSTALL CELLULAR CONCRETE PAVERS AND ALL BASE MATERIALS PER MANUFACTURER'S RECOMMENDATIONS.

**LEGEND:**


- |  |                          |  |                        |
|--|--------------------------|--|------------------------|
|  | CELLULAR CONCRETE PAVERS |  | AGGREGATE BASE         |
|  | BEDDING SAND             |  | AC PLUG                |
|  | BASE MATERIAL            |  | EXISTING PAVEMENT      |
|  | SUBBASE MATERIAL         |  | PERMEABLE PARKING AREA |
|  | PCC                      |  | NATIVE MATERIAL        |
|  |                          |  | NOTES                  |



Approved. \_\_\_\_\_

City Engineer

Date




**REVISION**

Description

Date

**ENGINEERING DIVISION**

**CELLULAR CONCRETE  
BLOCKS IN ROADSIDE  
DRAINAGE SWALE**

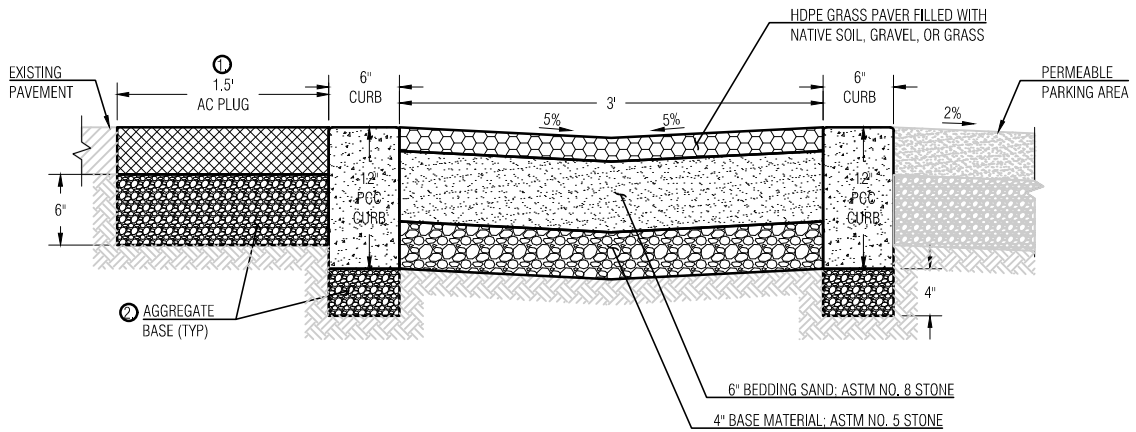

**NOTES:**

1. AC PLUG SHALL BE 4" THICK OR MATCH EXISTING PAVEMENT THICKNESS, WHICHEVER IS GREATER.
2. AGGREGATE BASE SHALL BE COMPACTED TO 95% OF MAXIMUM DRY DENSITY.
3. INSTALL HDPE GRASS PAVERS AND ALL BASE MATERIALS PER MANUFACTURER'S RECOMMENDATIONS.

**LEGEND:**


- |  |                       |  |                        |
|--|-----------------------|--|------------------------|
|  | HDPE PERMEABLE PAVERS |  | AGGREGATE BASE         |
|  | BEDDING SAND          |  | AC PLUG                |
|  | BASE MATERIAL         |  | EXISTING PAVEMENT      |
|  | SUBBASE MATERIAL      |  | PERMEABLE PARKING AREA |
|  | PCC                   |  | NATIVE MATERIAL        |
|  |                       |  | NOTES                  |



Approved. \_\_\_\_\_

City Engineer

Date




**REVISION**

Description	Date



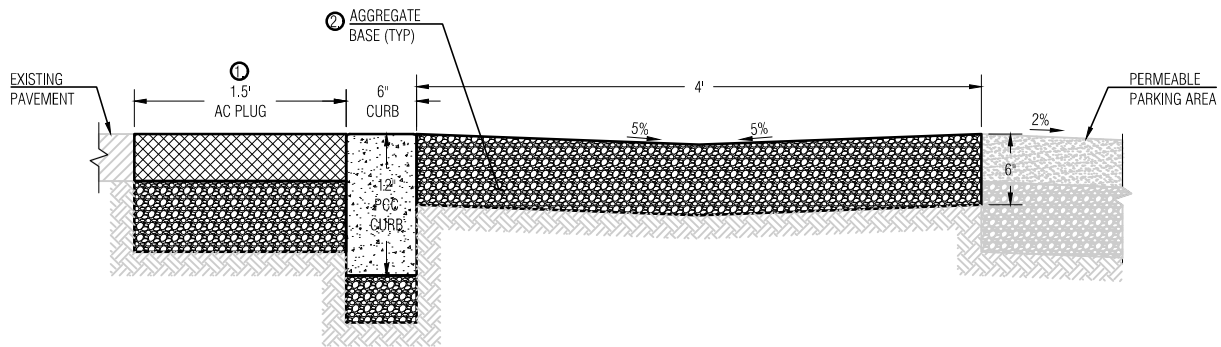


**ENGINEERING DIVISION**

**HDPE PAVER IN  
ROADSIDE SWALE**




NOTES:  
 1. AGGREGATE BASE SHALL BE COMPACTED TO 95% OF MAXIMUM DRY DENSITY.

LEGEND:

-  CONCRETE PAVERS
-  AGGREGATE BASE
-  BEDDING SAND
-  AC PLUG
-  BASE MATERIAL
-  EXISTING PAVEMENT
-  SUBBASE MATERIAL
-  PERMEABLE PARKING AREA
-  PCC
-  NATIVE MATERIAL
-  NOTES



Approved. \_\_\_\_\_ Date \_\_\_\_\_  
 City Engineer



REVISION	
Description	Date

**ENGINEERING DIVISION**

**COMPACTED AGGREGATE  
 BASE IN ROADSIDE SWALE**